

Eurotech

SHOWERS



REGENCY

SWING DOOR

Frameless
Design



REGENCY

Frameless Swing Door



finish options



- 304 Stainless steel handle and hinges
- Up to 3/8" adjustment for out of plumb conditions
- 10mm (3/8") Clear tempered glass
- **EnduroShield** Coating reduces cleaning time by up to 90%


- Pre-cut to fit 57-1/4" to 58-1/4" wide openings
- 12" Ladder style pull, back to back design
- Reversible door location capability
- Custom sizes available




**Eurotech
SHOWERS**

Designed by
Eurotech Showers
in California 


Eurotech SHOWERS

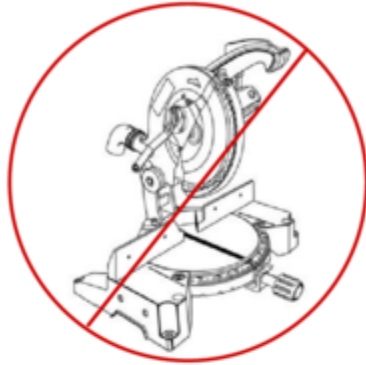


Pre-cut stainless steel track
fits 56 1/2" to 59" openings

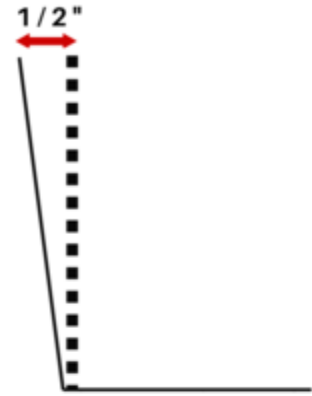




Adjustable for out of plumb walls
up to 1/2"

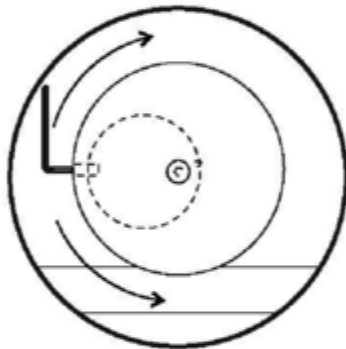

Easy adjust rollers
from one side

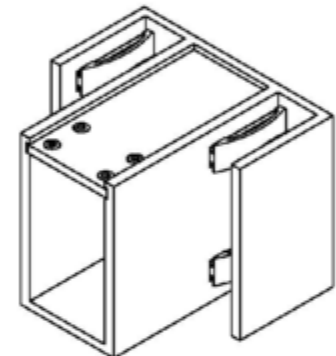

Glass grippers
keep doors closed
if header is out of level

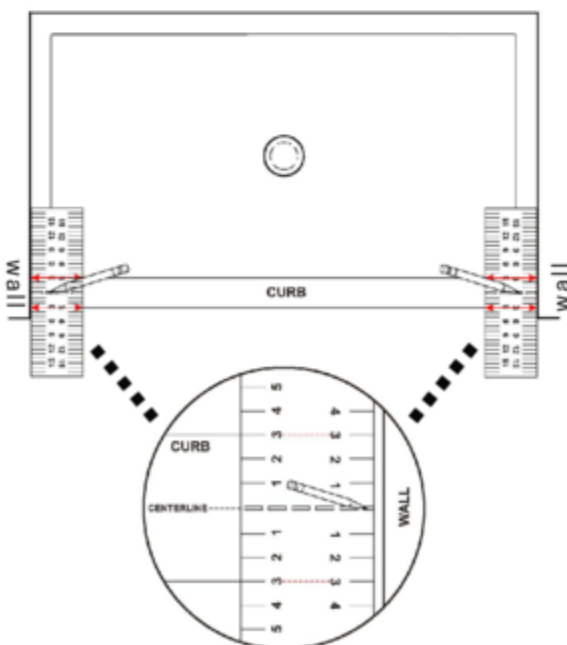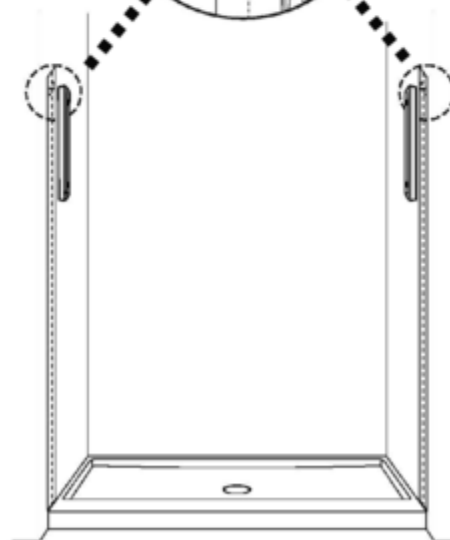



Engineered templates
easily determines hardware placement



Installer kit
drill bit, sealant finishing tool,
hex wrenches, painters tape

Specifications
Standard

Overhead View

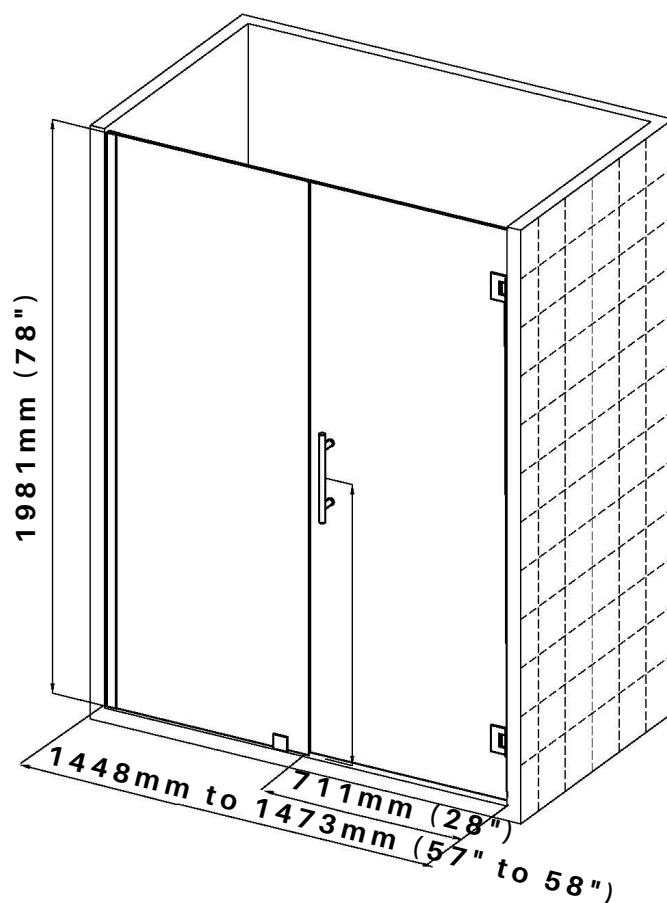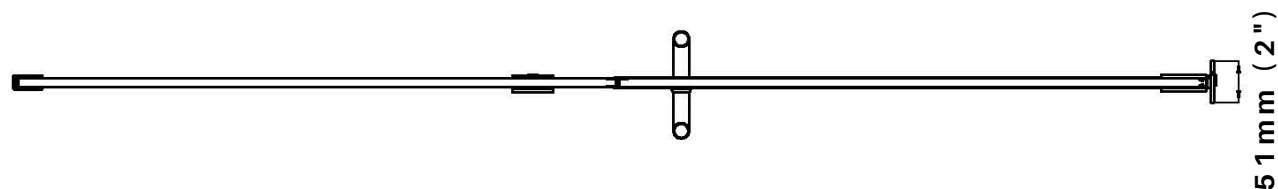

Technical Information

- Shower door style: swing door
- Glass Thickness: 10mm (3/8") Clear tempered glass
- Handle size: 305mm (12") Stainless Steel
- Hinge size: 64.5mm x 90mm (2 9/16" x 3 9/16") Stainless Steel
- Channel size: 16.5mm x 1981mm (5/8" x 78") industrial gauge aluminum
- Clamp size: 50mm x 50mm (2" x 2")
- Unit height: 1981mm (78")
- Unit width Min: 1448mm (57")
- Unit width Max: 1473mm (58")
- Walk-through width: 711mm (28")

CAUTION

Safe Operation of Frameless Shower Doors

- Frameless glass doors must be opened or closed slowly while maintaining control at all times.
- Frameless glass doors are equipped with safety bumpers and polycarbonate cushion seals to aid with water control & door safety. Seals and bumpers should not be removed for any reason.